

# American Steam Control

Division of Walsh Controls, Inc.

Submittal #02-200-00

## SUBMITTAL

The American Steam Control Type "W" control with integral sensor is designed for the control to be mounted directly to the valve body.

**Control Media: Wax Filled**

**Low Hysteresis: 1.6° F.**


FRP control heads are standard on all American Steam Control controls and have a **High Bending Resistance (183 lbs.)** and **Torque Resistance (19 ft./lbs.)**. The **Tamper Resistant Collar Nut** is heavy plated brass, round with a smooth finish and a flush hardened steel set screw.

**Temperature Range: 43° F to 86° F**


Range can be re-set internally without the need for set pins.

Limits and ranges can be set and locked internally without limiting the movement of the external dial.

Dimensions

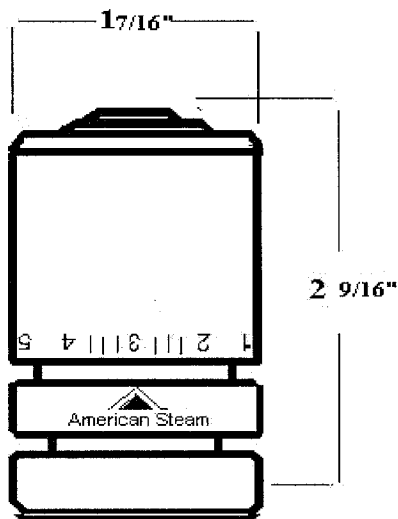

Typical Installation

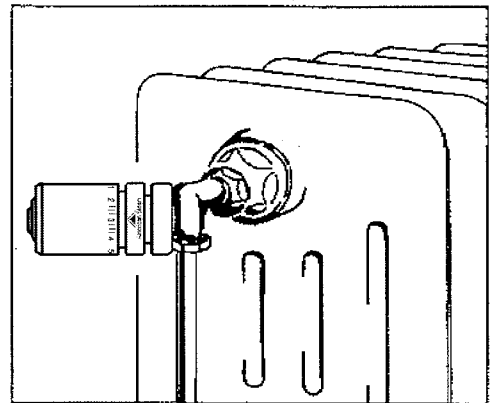

**CUSTOMER**

**PROJECT**

**ENGINEER**

**ARCHITECT**

**PRO/PO #**

4/03 KW

**American Steam Control**

Division of Walsh Controls, Inc.

[www.americansteamcontrol.com](http://www.americansteamcontrol.com)

101 Pennsylvania Blvd Pittsburgh, PA 15228

412-561-2195 1-888-703-3999

Fax: 412-344-8306