

## SUBMITTAL

### Features:

### TRV- 20


TRV-20 is a Fail - Close thermostatic radiator valve with a replaceable brass seat and disc for hot water applications.



This series valve contains American Steam Control's **unique** UNISERT-20, a fully removable insert, that fails in a 95% closed position if the control is removed or broken off (the remaining flow allows for frost protection).

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

## VERTICAL ANGLE VALVE - DIMENSIONS

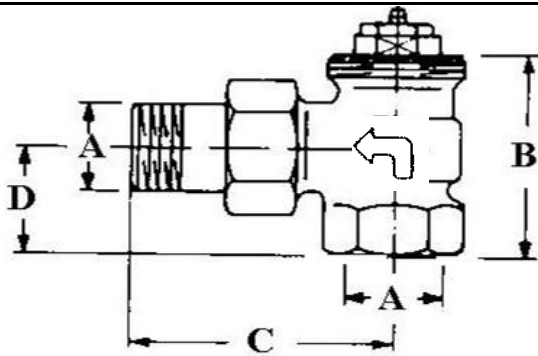

SIZE	A	B	C	D
1/2"	1/2"	1 7/8"	2 3/8"	1"
3/4"	3/4"	2 1/16"	2 5/8"	1 1/8"
1"	1"	2 3/8"	2 15/16"	1 5/16"
1 1/4"	1 1/4"	2 3/4"	3 3/8"	1 9/16"

### Specifications

#### Application Range:

Max. Temperature:	250° F
Max. Water Pressure:	150 psig
Max. Steam Pressure:	15 psig


#### Materials:

Valve Body:	Brass, Nickel Plated
Trim:	Unisert -20
Casing:	Brass
Stem:	Stainless Steel
Seat:	Brass
Disc:	EPDM (Nordel)
Fail - Close disc:	Brass
O-Ring Seals:	EPDM (Nordel)


\* End Connections: Available with FPT x MPT, FPT x Solder, Solder x Solder (Double Union Only)

## Other Available Body Styles


Horizontal Angle




Straight Pattern Single Union



Straight Pattern Double Union



One Pipe Steam



**CUSTOMER**

**PROJECT**

**ENGINEER**

**ARCHITECT**

**PRO/PO #**

**American Steam Control**

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

98 Vanadium Rd., Building D Bridgeville, PA 15017

412-220-9204 1-888-703-3999

Fax: 412-220-9351