

## SUBMITTAL

### TRV- 30




**Features:**

TRV-30 is a thermostatic radiator valve with a replaceable stainless steel seat and disc for steam and hot water applications.

This series valve contains American Steam Control CARTRIDGE-30, a removable insert, that fails in the "open" position if the thermostatic control is removed or broken off.

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

### VERTICAL ANGLE VALVE - DIMENSIONS

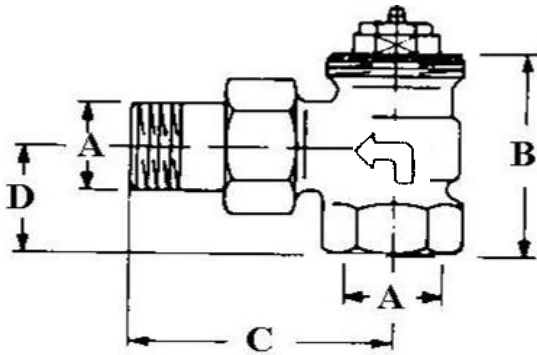

SIZE	A	B	C	D
1/2"	1/2"	1 7/8"	2 3/8"	1"
3/4"	3/4"	2 1/16"	2 5/8"	1 1/8"
1"	1"	2 3/8"	2 15/16"	1 5/16"
1 1/4"	1 1/4"	2 3/4"	3 3/8"	1 9/16"

**Specifications**

Application Range:  
 Max. Temperature: 250° F  
 Max. Water Pressure: 150 psig  
 Max. Steam Pressure: 15 psig


**Materials:**

Valve Body: Brass, Nickel Plated  
 Trim: Unisert -30  
 Casing: Brass  
 Stem: Stainless Steel  
 Seat: Stainless Steel  
 Disc: Stainless Steel  
 O-Ring Seals: EPDM (Nordel) or Viton


\* End Connections: Available with FPT x MPT, FPT x Solder, Solder x Solder (Double Union Only)

### Other Available Body Styles


Horizontal Angle




Straight Pattern Single Union



Straight Pattern Double Union



One Pipe Steam



<b>CUSTOMER</b>
<b>PROJECT</b>
<b>ENGINEER</b>
<b>ARCHITECT</b>
<b>PRO/PO #</b>
10/16kw

### American Steam Control

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

98 Vanadium Rd., Building D Bridgeville, PA 15017

412-220-9204 1-888-703-3999

Fax: 412-220-9351