

## SUBMITTAL

### Features:

### TRV- 40


TRV-40 is a thermostatic radiator valve with a replaceable EPDM disc and integral brass seat for steam and hot water applications.



This series valve contains American Steam Control CARTRIDGE-40, a removable insert, that fails in the "open" position if the thermostatic control is removed or broken off.

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

## VERTICAL ANGLE VALVE - DIMENSIONS

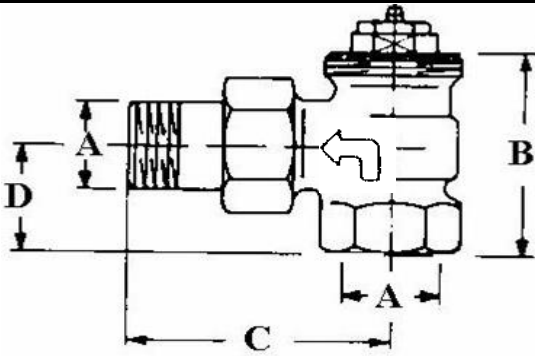

SIZE	A	B	C	D
1/2"	1/2"	1 7/8"	2 3/8"	1"
3/4"	3/4"	2 1/16"	2 5/8"	1 1/8"
1"	1"	2 3/8"	2 15/16"	1 5/16"
1 1/4"	1 1/4"	2 3/4"	3 3/8"	1 9/16"

### Specifications

#### Application Range:

Max. Temperature:	250° F
Max. Water Pressure:	150 psig
Max. Steam Pressure:	15 psig


#### Materials:

Valve Body:	Brass, Nickel Plated
Trim:	Cartridge - 40
Casing:	Brass
Stem:	Stainless Steel
Seat:	Brass
Disc:	EPDM (Nordel)
O-Ring Seals:	EPDM (Nordel)


\* End Connections: Available with FPT x MPT, FPT x Solder, Solder x Solder (Double Union Only)

### Other Available Body Styles


Horizontal  
Angle




Straight Pattern  
Single Union



Straight Pattern  
Double Union



One Pipe Steam



**CUSTOMER**

**PROJECT**

**ENGINEER**

**ARCHITECT**

**PRO/PO #**

10/16kw

**American Steam Control**

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

98 Vanadium Rd., Building D Bridgeville, PA 15017

412-220-9204 1-888-703-3999

Fax: 412-220-9351