

SUBMITTAL

Features:

TRV- 20




TRV-20 is a Fail - Close thermostatic radiator valve with a replaceable brass seat and disc for hot water applications.

This series valve contains American Steam Control's **unique** UNISERT-20, a fully removable insert, that fails in a 95% closed position if the control is removed or broken off (the remaining flow allows for frost protection).

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

STRAIGHT PATTERN VALVE - DIMENSIONS

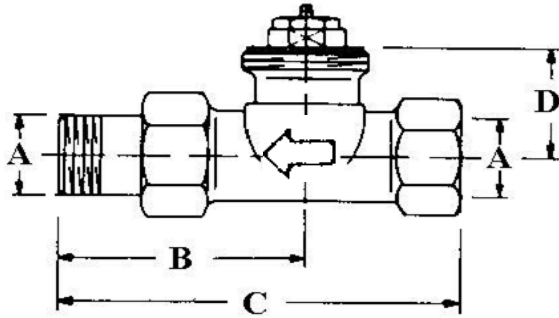

SIZE	A	B	C	D
1/2"	1/2"	2 5/16"	3 3/4"	1 1/8"
3/4"	3/4"	2 1/2"	4 3/16"	1 1/8"
1"	1"	3 1/8"	4 5/16"	1 1/8"
1 1/4"	1 1/4"	5 7/8"	3 1/2"	1 1/8"

Specifications

Application Range:

Max. Temperature:	250° F
Max. Water Pressure:	150 psig
Max. Steam Pressure:	15 psig


Materials:

Valve Body:	Brass, Nickel Plated
Trim:	Unisert -20
Casing:	Brass
Stem:	Stainless Steel
Seat:	Brass
Disc:	EPDM (Nordel)
Fail - Close disc:	Brass
O-Ring Seals:	EPDM (Nordel)


* End Connections: Available with FPT x MPT, FPT x Solder, Solder x Solder (Double Union Only)

Other Available Body Styles


Horizontal
Angle




Vertical
Angle



Straight Pattern
Double Union



One Pipe Steam



CUSTOMER

PROJECT

ENGINEER

ARCHITECT

PRO/PO #

American Steam Control

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

98 Vanadium Rd., Building D Bridgeville, PA 15017

412-220-9204 1-888-703-3999

Fax: 412-220-9351