

American Steam Control

Division of Walsh Controls, Inc.

Submittal #01-131-01

SUBMITTAL

Features:

TRV- 30


One Pipe Steam Valve is used on one pipe steam systems. An air vent is required with the valve, along with a thermostatic control.



This series valve contains American Steam Control UNISERT-30, a removable insert, that fails in the "open" position if the thermostatic control is removed or broken off.

With the use of the A.S.C. UNICHANGER, the valve insert may be changed without draining the system or disturbing the piping.

ONE PIPE STEAM

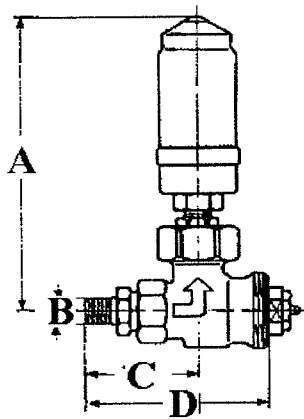

Specifications

Application Range:

Max. Temperature: 250° F
 Max. Water Pressure: 150 psig
 Max. Steam Pressure: 15 psig

Materials:

Valve Body: Brass, Nickel Plated
 Trim: Unisert -30
 Casing: Brass
 Stem: Stainless Steel
 Seat: Stainless Steel
 Disc: Stainless Steel
 O-Ring Seals: EPDM (Nordel) or Viton

SIZE	A	B	C	D
1/8"	4 3/4"	1/8"	1 9/16"	2 9/16"

CUSTOMER

PROJECT

ENGINEER

ARCHITECT

PRO/PO #

American Steam Control

Division of Walsh Controls, Inc.

www.americansteamcontrol.com

101 Pennsylvania Blvd Pittsburgh, PA 15228

412-561-2195 1-888-703-3999

Fax: 412-344-8306